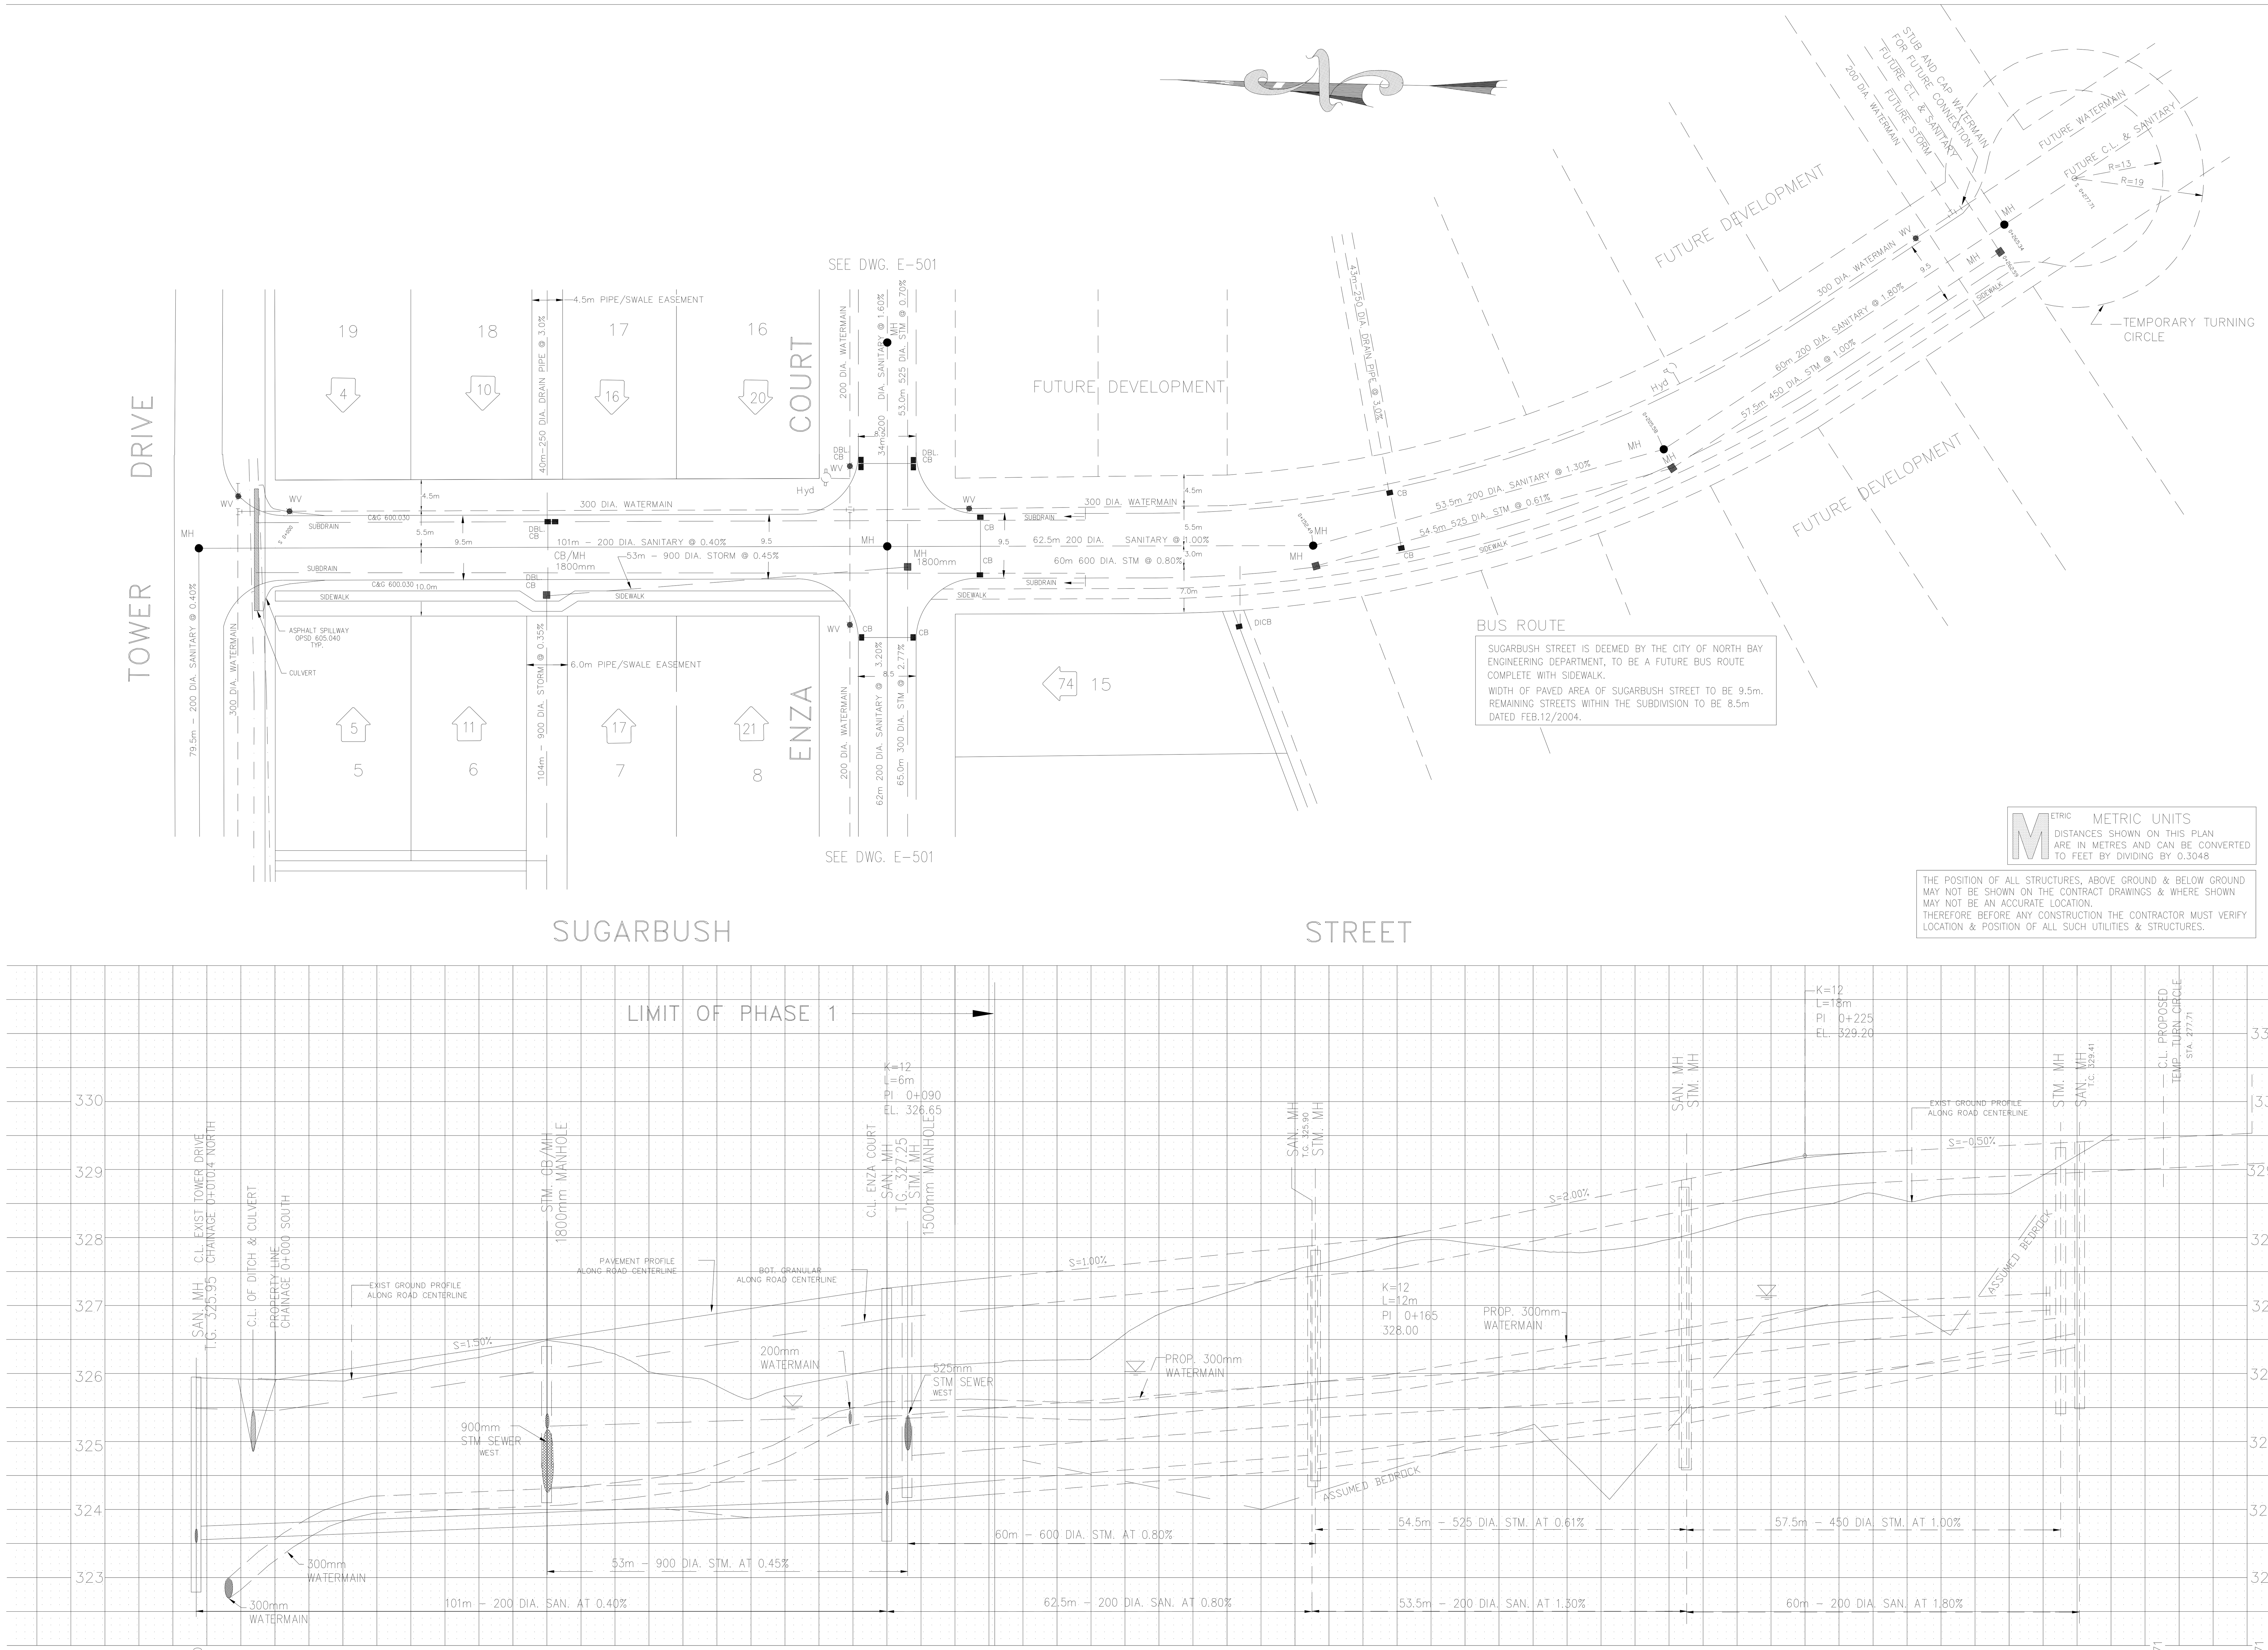

℄ ROAD CHAINAGE	TOP OF PAVEMENT ELEVATION	STORM SEWER INVERTS	SANITARY SEWER INVERTS	TOP OF WATERMAIN ELEVATION
0−11.60	325.95		S 323.58 W 323.52	323.0
0+000	325.90			
0+010	326.05			
0+020	326.20			
0+030	326.35			
0+040	326.50	S 324.26 W 324.20		324.30
0+050	326.65			
0+060	326.80			
0+070	326.95			
0+080	327.10			
0+090	327.25	N 324.50 E 324.87 W 325.15 S 324.80	N 323.98 E 325.20 W 324.06 S 324.10	325.60
0+100	327.35			
0+110	327.45			
0+120	327.55			325.55
0+130	327.65			
0+140	327.75			
0+150	327.85	N 325.28 S 325.35	N 324.60 S 324.60	
0+159	327.94			
0+165	328.00			326.00
0+171	328.12			
0+180	328.30			
0+190	328.50			
0+200	328.70			
0+210	328.90	N 325.68 S 325.76	N 325.29 S 325.30	326.60
0+216	329.02			
0+225	329.17			
0+230	329.22			
0+234	329.25			
0+240	329.28			
0+250	329.33			
0+260	329.38	N 326.34	N 326.40	327.20
0+270	329.43			
0+277.71	329.46			
0+280	329.48			
0+290.71	328.78			

METRIC UNITS
DISTANCES SHOWN ON THIS PLAN ARE IN METRES AND CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048

THE POSITION OF ALL STRUCTURES, ABOVE GROUND & BELOW GROUND MAY NOT BE SHOWN ON THE CONTRACT DRAWINGS & WHERE SHOWN MAY NOT BE AN ACCURATE LOCATION.
THEREFORE BEFORE ANY CONSTRUCTION THE CONTRACTOR MUST VERIFY LOCATION & POSITION OF ALL SUCH UTILITIES & STRUCTURES.

Disclaimer

The information contained on this drawing may be based upon data provided by others and may not have been verified by either as-constructed drawings or an Ontario Land Surveyor. The City of North Bay cannot accept responsibility for any errors or omissions on any information shown herein. Field verification, land surveys or excavation (with City approvals) may be required to determine actual location of any and all utilities or property lines.

APP'D BY	DETAILS	DATE	No

REVISIONS

ETON HOMES LTD.

CITY OF NORTH BAY
SUGAR BUSH VILLAGE
PHASE 1

PLAN & PROFILE
SUGARBUSH STREET

DRAWN BY:		DATE: NOV./2003	
CHECKED BY:		SCALE: HORIZ. 1 : 500 VERT. 1 : 50	
CAD FILE:			
OFFICE	PROJECT No	DRAWING No S-1001	REV.